

TLT632A

Small Scissor lift

Features


- Standard 3t small double scissor lift .
- In-ground installation type ,without occupying space.
- It's convenient for demounting tyres and repairing chassis with synchronous hydraulic cylinders assembly.
- The lift features advanced ,deft and reasonable design, durability, and compact layout.
- Anti-explosion safety device makes it stable and reliable operation.
- Travel limit safety device ,protects machine from being damaged.
- All moving points adopt automatic lubricating oil-free bearing for ensuring long lifespan.
- Oil hose anti-explosion device.
- CE certificated.



Technical parameters

Rated load:	3200kg
Lifting height:	1900mm
Initial height:	300mm
Lifting time:	≤50s
Lowering time:	≥20s
Runway width :	520mm
Runway length :	1580~1900mm
Advised distance between two runways:	800mm
Overall width:	1840mm
Safety method :	Mechanical safety lock + pneumatic release
Motor power :	2. 2kw
Motor voltage:	3 phase/380v or Single phase/220V

Overall size

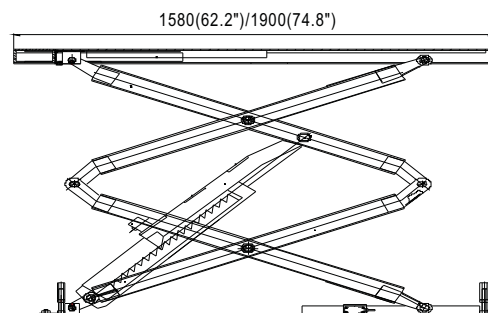

Optional parts

High brightness LED band



Environmental Requirement

Working temperature :	-5℃ ~+40℃
Transport/storage temperature :	-5℃ ~+ 40℃
Relative humidity :	Temperature+ 30℃,relative humidity 8 0 %
Height above sea level:	No more than 2000m

